


Everglass Light



hardness 80
ShD

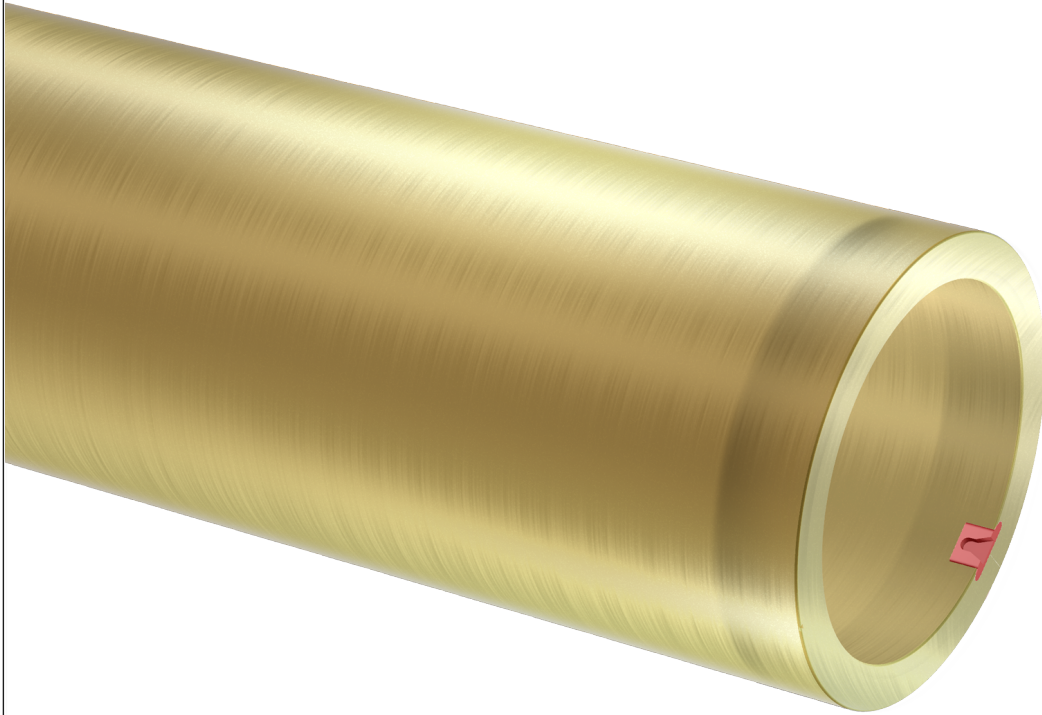

HD print level



high longevity



humidity
resistant



mechanical
resistance



solvent
resistant

Plate holder sleeve for use with double-sided adhesive cushion tapes. The fibreglass on the outer side surface guarantees good mechanical strength, complete resistance against all solvents and dimensional stability. Especially designed for “Label” and “Narrow Web” printing field.

- Available with PU slots or with optional PU ring.

structure

Base sleeve in fiberglass, covered with layers of ultralight hydrophobic polyurethane. A final outer fibreless layer extends to lateral fiberglass flanges, completely encapsulating the sleeve.

specifications

| | |
|---|---|
| Colour | Yellow |
| Max Diameter | 700 [mm] // 27.559" |
| Min / Max Length - Tolerance UNI:ISO 2768T1m | 350 - 2.850 [mm] // 13.78" - 112.205" |
| Thickness | 1,9 - 70 [mm] // 0.075" - 2.756" |
| Surface hardness - Tolerance +/-5 Shore D | 80 Shore D |
| Compressed air for sleeve assembly | 6 - 10 [bar] // 87 - 145 PSI Minimum capacity: 700 [l/min] with air input having a free passage with D => 8[mm] |
| Operating temperature | 18 - 40 °C // 64,4 - 104 °F |
| Register notch | PU Slot for wall thickness over 7.5 [mm] - Optional: Protection ring in polyurethane with integrated notch |
| Standard reference guidelines | 1 longitudinal corresponding to the register notch - 1 circumferential in centre |
| Working tolerance | External finishing with precision grinding (Ra=0.8) with T.I.R. < 0.02 mm] when measured on a mandrel with T.I.R. <= 0.005 [mm] |
| Cleaning and Storage | Use ethanol with an additional max 20% of ethyl acetate; store vertically |

Rossini S.p.A. provides no warranties that the contents of this document demonstrate, in particular, the fitness of the products it contains for any specific purpose; we therefore ask customers to verify in advance that the product's characteristics are suitable for its intended use. Rossini S.p.A. reserves the right to update this publication and periodically modify its contents, including technical/commercial information, without further notice of the amendments or changes made. This document and any logos, trademarks and specifications etc. it contains are protected by copyright laws with all rights reserved.



Rossini World
Italy • France • Spain
Germany • United Kingdom
Romania • Brasil • China
United States • India

Rossini S.p.A. HeadQuarters
Via de Gasperi, 5
20027 Rescaldina - Milano - Italy
Tel. +39 0331 47 27 11 - Fax +39 0331 57 97 46
comm.dept@rossini-spa.it

WWW.ROSSINI-SPA.IT