


Idrolast



hardness
range 30-40

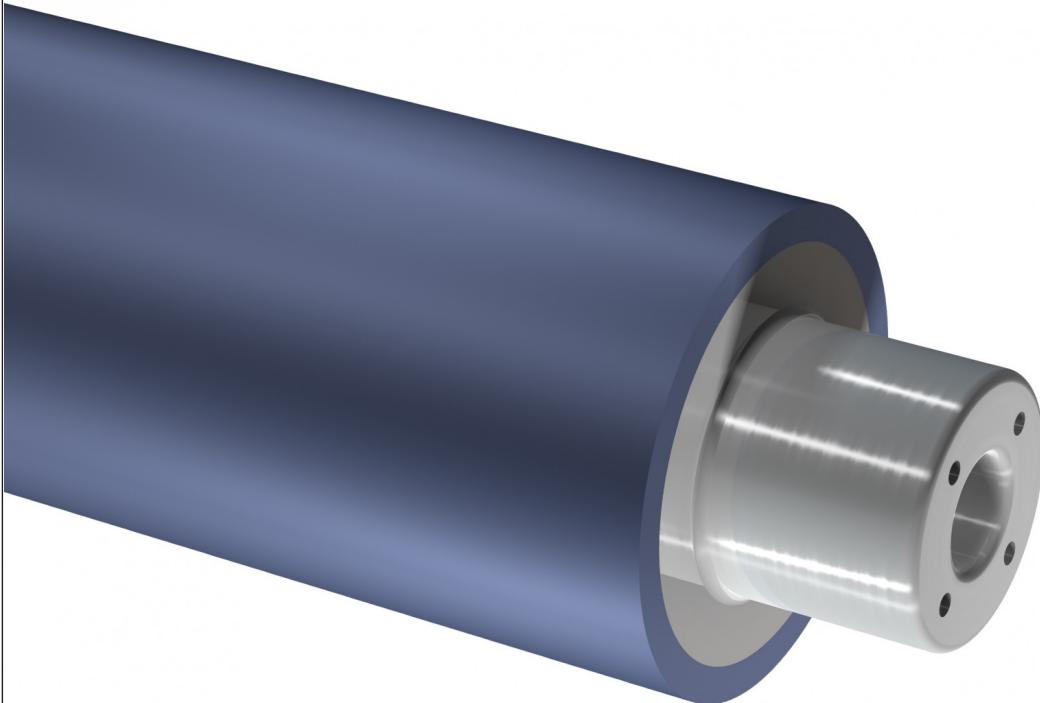

max load 25
[kg/cm]



max temp
100°C

High elastic polymer used for drive rollers and/or pressure rollers for special applications. Available in 30 to 40 hardness Shore A. Cleaning with gasoline or with a blend of 80% ethyl alcohol and 20% ethyl acetate.

All the special Rossini compounds are available both in Speedwell Sleeve configuration and Rubber roller.

structure

Roller with steel core coated with Idrolast elastomer ground to measurement.

specifications

Colour	Light blue
Max Diameter	35 - 550 [mm] // 1.378" - 21.654"
Min/Max length including pins	150 - 5.000 [mm] // 5.882" - 196.078"
Coating thickness	5 - 35 [mm] // 0.197 - 1.373"
Surface hardness - Tolerance +/-5 Shore A	25 - 40 Shore A
Maximum resistance to pressure	25 [Kg/cm]
Maximum temperature resistance	100 °C - 212 °F
Working tolerance	External finishing with precision grinding (Ra=1.5) with T.I.R. < 0.04 [mm]
Resistance to chemicals	Gasolines - Alcohol - Oil - Water - Ozone - Not MEK

Rossini S.p.A. provides no warranties that the contents of this document demonstrate, in particular, the fitness of the products it contains for any specific purpose; we therefore ask customers to verify in advance that the product's characteristics are suitable for its intended use. Rossini S.p.A. reserves the right to update this publication and periodically modify its contents, including technical/commercial information, without further notice of the amendments or changes made. This document and any logos, trademarks and specifications etc. it contains are protected by copyright laws with all rights reserved.



Rossini World
Italy • France • Spain
Germany • United Kingdom
Romania • Brasil • China
United States • India

Rossini S.p.A. HeadQuarters
Via de Gasperi, 5
20027 Rescaldina - Milano - Italy
Tel. +39 0331 47 27 11 - Fax +39 0331 57 97 46
comm.dept@rossini-spa.it

WWW.ROSSINI-SPA.IT