


Roto Flow Inking Roller



antistatic
sleeve

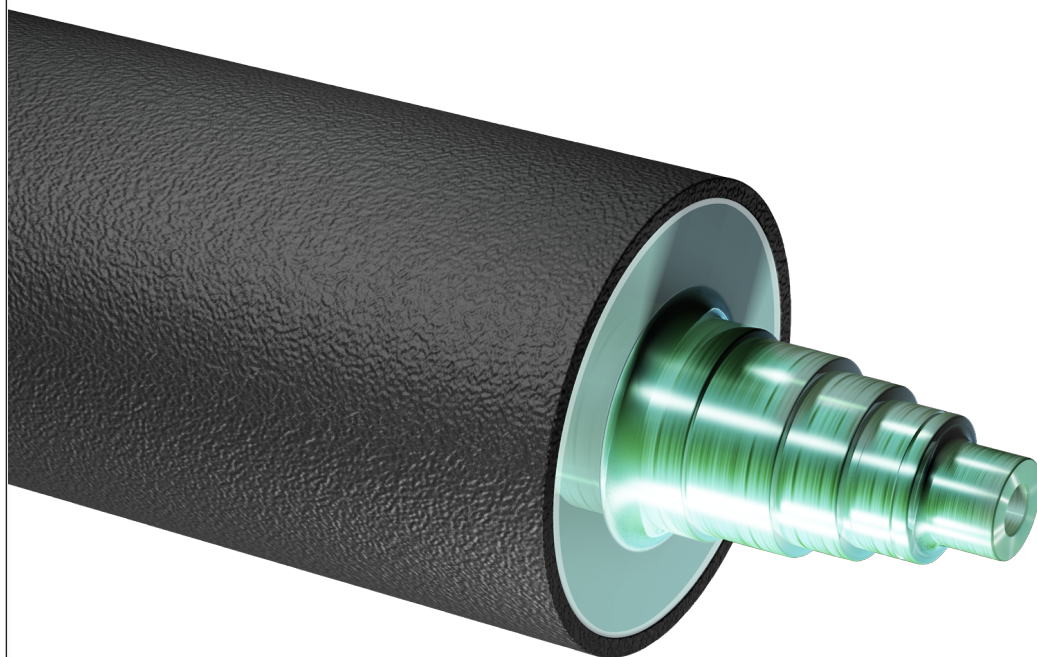


Black for
Flexo



Grey for Roto



max load 25
[kg/cm]



orange peel
engraving



square cells
engraving

Ink transfer roller laser engraved (orange peel or square cells). High resistance against acetate, alcohol, MEK and max 20% toluene. Cleaning with 100% ethyl acetate.

All the special Rossini compounds are available both in Speedwell Sleeve configuration and Rubber roller.

structure

Rubber-coated roller according to the printing press manufacturer's specifications/design

specifications

Colour	Black
Min/Max diameter	35 - 550 [mm] // 1.373" - 21.569"
Min/Max length including pins	150 - 5.000 [mm] // 5.882" - 196.078"
Coating thickness	10 - 35 [mm] // 0.394" - 1.373"
Surface hardness - Tolerance +/-3 Shore A	55 - 75 Shore A
Maximum temperature resistance	140 °C - 284 °F
Resistance to chemicals	Alcohol - Ethyl acetate - MEK - Toluene max 20% - Water

Rossini S.p.A. provides no warranties that the contents of this document demonstrate, in particular, the fitness of the products it contains for any specific purpose; we therefore ask customers to verify in advance that the product's characteristics are suitable for its intended use. Rossini S.p.A. reserves the right to update this publication and periodically modify its contents, including technical/commercial information, without further notice of the amendments or changes made. This document and any logos, trademarks and specifications etc. it contains are protected by copyright laws with all rights reserved.



Rossini World
Italy • France • Spain
Germany • United Kingdom
Romania • Brasil • China
United States • India

Rossini S.p.A. HeadQuarters
Via de Gasperi, 5
20027 Rescaldina - Milano - Italy
Tel. +39 0331 47 27 11 - Fax +39 0331 57 97 46
comm.dept@rossini-spa.it

WWW.ROSSINI-SPA.IT